


Declaration of performance no. CPR2013005

- 1.Product: profile sheet roofing and wall covering products
2.Product type identification: **Trapezoidal profile WE-45R / 900; Heavy WE-45A / 900; Heavy WE-45B / 900**

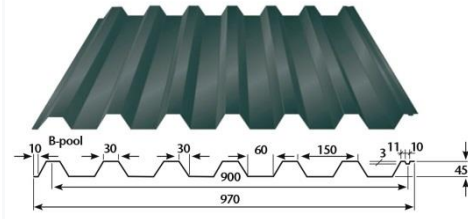

3. Intended use:
Self-supporting profiled metal products for roofings, ceilings, soffit, external cladding and internal lining.
4. Manufacturer: **AS Esco; 25 Aiandi Road, Viimsi 74001 Harju County, Estonia ; phone +372 6055 690 , web-site www.weckman.ee**
5.Authorized representative: Not applicable
6. The system or systems of assessment and verification of constancy of performance of the construction product, as set out in system 4
7.NPD
8.NPD
9.Declared performance

<i>Main features</i>	<i>Functionality</i>	<i>Harmonized technical specification</i>
Mechanical resistance:	Trapezoidal profile WE-45(R;A;B)/900, thickness 0,45;0,50;0,60;0,70;0,80;0,90 mm, class 1 – S280GD:S350GD+Z275; DX51D+Z275:Z350side 1 : PE 25:50 µm; PUREX 26µm; PURAL50 µm; PURAL MATT 50 µm; PVDF 27 µm; tsinkkate Z275:350; NOVA, NOVA MATT 50 µm side 2 : krunt+epoksüüdvärv 12 µm; PE 6-10 µm; tsinkkate Z275:350 EVS EN 508-1:2014 Load Capacity : NPD	EVS EN 14782:2007
Water permeability:	The product is waterproof	
Dimensional change:	According to EN 14782-2007	
Release of dangerous substances:	NPD	
External fire performance:	B _{ROOF(t1)} , B _{ROOF(t2)} , B _{ROOF(t3)}	
Reaction to fire:	A1	
Duration:	Same as mechanical strength	

10.The performance of the product as defined in points 1 and 2 shall be consistent with the declared performance referred to in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in section 4.

11.Signed by and on behalf of the manufacturer:
Peep Siimon, CEO
Viimsi, 22.08.2019